


AA92H Series Custom Configuration Chart

Note that transmit position 'E' does not have a corresponding switched RX input. RX audio is selected as a function of the TX Selector being set to this position.

Position 'F' is normally the PA position. Lighted knobs (as used on the AA95) do not fit on this controller. A smaller knob can be used for the TX selector. Concentric volume knobs (RX and ICS) cannot be supplied as illuminated knobs.

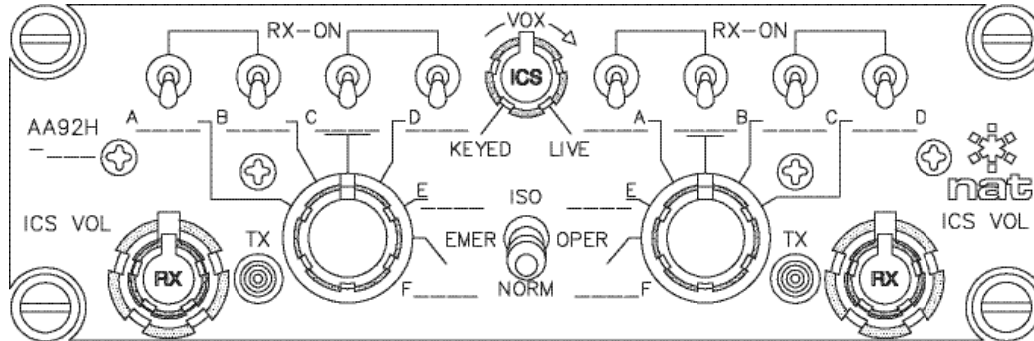

Installation Information:

Airframe Type:

Control Location(s):

Number of Controls/Ship:

Legends:

A: D:

B: E:

C: F:
(Normally PA Function)

Functions:

Similar to existing model:

ICS Tie line (Y/N):

Tape Inputs (Switched, direct, none):

Special Lighting:
(Must be DC; default - 28 VDC natural)

#1 Direct Input to L/H or R/H side?:

#2 Direct Input to L/H or R/H side?:

Special Knobs:

Other Special Functions:

.....

.....

.....

.....

.....

.....